




SUBMITTAL DATA

1.5" ASL - 16" ASL

AIR SEPARATORS

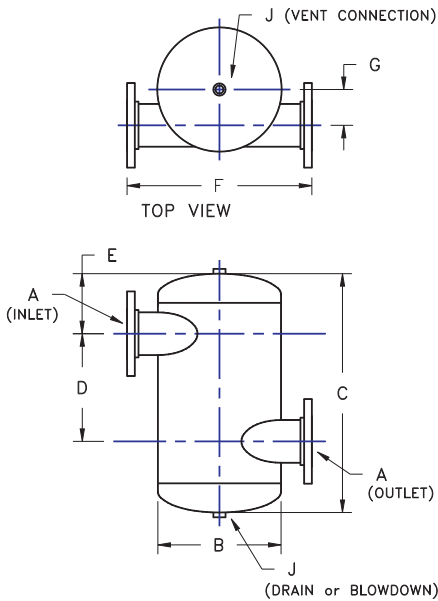


DIMENSIONS & SPECIFICATIONS

MODEL NO.	CONNECTION/ FLANGE	DIMENSIONS (IN.)						VENT & DRAIN CONNECTION	WORKING PRESSURE (PSIG)	SHIP WEIGHT (lbs)
		A	B	C	D	E	F			
1.5 ASL	1.5"	6.63	18.5	6.5	6.0	15.0	2.0	3/4" NPT	175	29
2 ASL	2"	6.63	18.5	7.0	5.75	15.0	1.81			32
2.5 ASL	2.5"	8.63	19.19	7.5	5.85	15.0	2.5			50
3 ASL	3"	10.75	23.0	8.0	7.5	17.0	3.0			81
4 ASL	4"	12.75	26.38	10.0	8.19	20.75	3.5			99
5 ASL	5"	16.00	34.5	12.0	11.25	24.0	4.19			186
6 ASL	6"	18.00	41.0	14.0	13.5	26.0	4.25			232
8 ASL	8"	24.00	52.0	18.0	17.0	32.0	5.75		400	
10 ASL	10"	30.00	59.5	22.0	18.75	40.0	7.75		700	
12 ASL	12"	36.00	70.0	26.0	22.0	46.0	7.75		1000	
14 ASL	14"	42.00	72.0	30.0	21.0	56.0	12.0		1200	
16 ASL	16"	48.00	80.0	32.0	24.0	60.0	14.0		1700	

DESIGNED AND CONSTRUCTED PER ASME SECTION VIII, DIV. 1
MAXIMUM WORKING TEMPERATURE: 375°F

Air Separator Pressure Drop - ASL

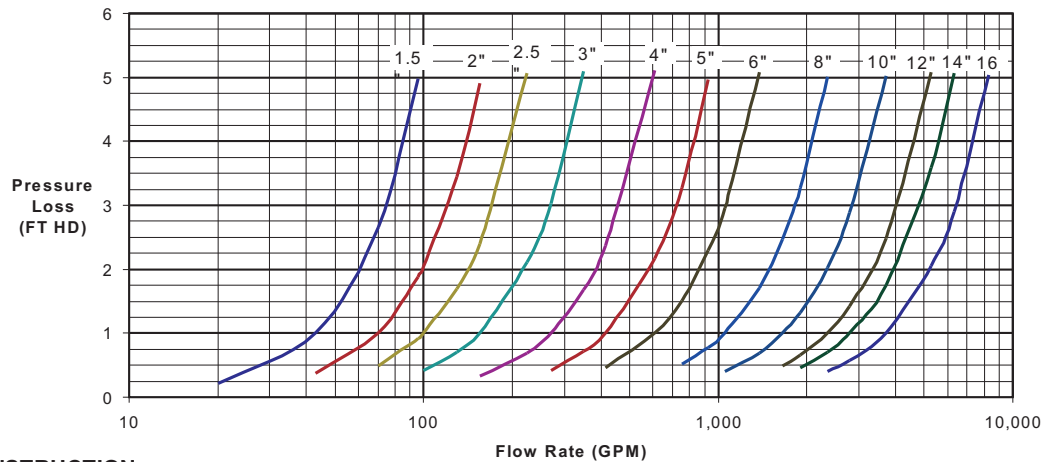

MATERIALS OF CONSTRUCTION

BODY	STEEL
NOZZLES	STEEL

Job Name _____

Location _____

Engineer _____

Architect _____

Sales Rep. _____

Contractor _____

Model Number _____

Temperature _____

Capacity _____

Liquid _____

Notes _____
