




SUBMITTAL DATA

T & TV SERIES DIAPHRAGM THERMAL EXPANSION & HYDRO-PNEUMATIC TANKS FOR DOMESTIC / POTABLE SYSTEMS

Models and Dimensions IN-LINE MODELS


Model Number	Tank Volume	Accept Volume	Dimensions (IN.)		System Conn. (NPT)	*Ship Weight (lbs.)
	(gal)	(gal)	Dia.	Height		
T-15	2.1	1.3	7.9	10.8	3/4"	5
T-12	4.8	2.9	10.5	13.7	3/4"	9
T-25	9.3	5.5	11.8	15.4	1"	18
T-30	13.2	7.8	15	21	1"	23

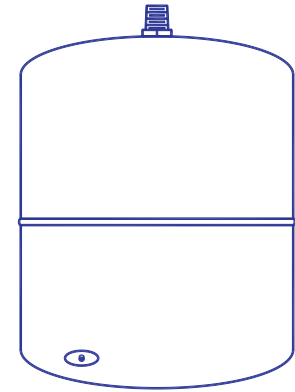

T - In-Line Model

STAND MODELS

Model Number	Total Volume (gal)	Accept Volume (gal)	System Conn. (NPT)	A	B	C	Ship Weight (lbs)
T-42V	21	15	1"	23.6	17.7	7.75	33
T-60V	40	28	1 1/4"	35.2	19.7	8	60
T-80V	53	37	1 1/4"	33.9	23.6	9	81
T-180V	79	56	1 1/4"	44.7	24.8	9.5	105
T-260V	106	74	1 1/4"	57.1	24.8	9.5	145
T-325V	132	93	1 1/4"	53.1	29.5	11	190

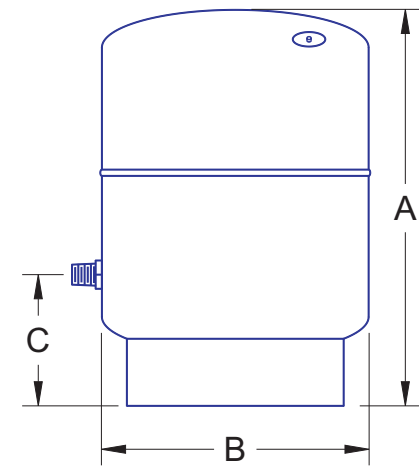

TV - Stand Model

Materials of Construction

Shell:	Steel
Bladder:	Heavy Duty Butyl
System Connection:	Stainless Steel

*FDA listed material

Maximum Operating Conditions

Working Temperature:	240° F
Working Pressure (PSIG):	150 PSIG

Factory Precharged: 40 PSI

Job Name _____

Location _____

Engineer _____

Architect _____

Sales Rep. _____

Contractor _____

Model Number _____

Temperature _____

Capacity _____

Liquid _____

Notes _____
