



# SUBMITTAL DATA


## Tank Drains

Models: 2, 2X & 3X

### DIMENSIONS & SIZING

PART NUMBER	MODEL	TANK DIAMETER	A (IN)	B (IN)	C (IN)	D (NPT)
416-2	2	14" OR LESS	12.69	11.00	1.19	1/2"
416-3	2X	14" OR LESS	12.69	11.00	1.19	1/2"
	+ 6	20"	18.19	16.50	1.19	1/2"
	+ 12	24"	24.44	22.75	1.19	1/2"
	+ 6 & 12	30"	29.94	28.25	1.19	1/2"
416-4	3X	14" OR LESS	12.19	10.94	1.50	3/4"
	+ 6	20"	17.88	16.44	1.50	3/4"
	+ 12	24"	23.13	22.69	1.50	3/4"
	+ 6 & 12	30"	29.63	28.19	1.50	3/4"


\*\*\*SEE "Z" DIMENSIONS BELOW

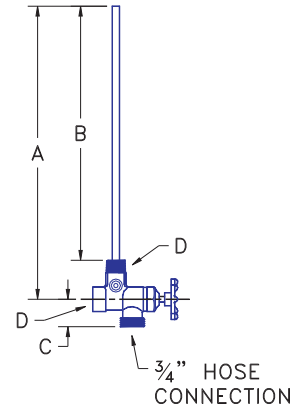

### "Z" DIMENSIONS FOR 2X & 3X WITH EXTENSIONS

MODEL	STANDARD LENGTHS	6" EXT	12" EXT	6" & 12" EXT
2X	11.44	16.94	23.19	28.69
3X				

Designed to route air that has been separated (with an Air Purger or Air Separator) from the system back to the compression tank and to restrict gravity flow of water between the tank and system.

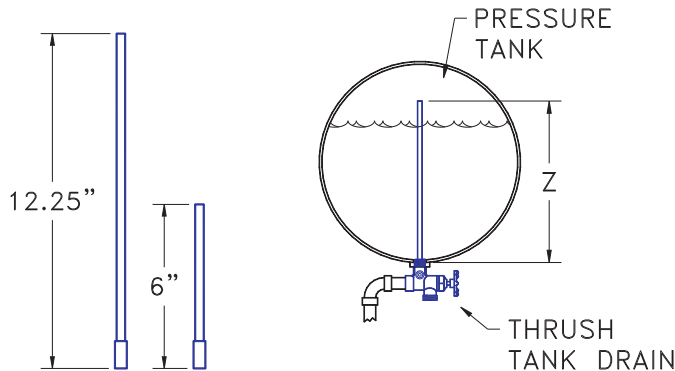

### MAXIMUM OPERATING CONDITIONS

MAXIMUM TEMPERATURE	240°F
MAXIMUM PRESSURE	125 PSIG

### MATERIALS OF CONSTRUCTION

BODY	BRONZE
VENT TUBES	COPPER

**Job Name** \_\_\_\_\_  
**Location** \_\_\_\_\_  
  
**Engineer** \_\_\_\_\_  
**Architect** \_\_\_\_\_  
**Sales Rep.** \_\_\_\_\_  
**Contractor** \_\_\_\_\_

**Model Number** \_\_\_\_\_  
**Notes** \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_